


PROFILE FOR SEALING

TPO

PVC

Description

Wall profile in plasticised sheet with development 7 cm, suitable for sealing with TPO and PVC. With external rivet.

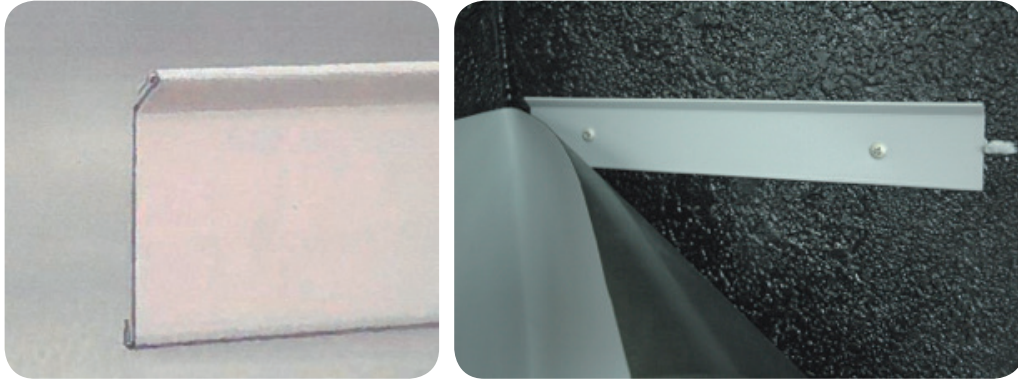

Fields of application

Finishing profiles of waterproof coverings (vertical, closing, terminals, etc.). The profile provides aesthetic continuity with direct connection (welding) between the membrane used for the prevalent part of the surface, vertically and the finishing areas (finishing profiles, flashing, etc.).

Installation

Profiles secured mechanically and top sealed with RUBBER SEALANT.

TECHNICAL FEATURES

Features	U.M.	Values
Development	mm	70
Length	m	2
Thickness	mm	1,2
Weight	kg/m	0,42
Colour		Grey

Rev. 00 (11-15)

As IMPER ITALIA srl has no control over how or where its products are supplied (e.g., over substrates, service conditions, or compliance with instructions), the company cannot accept any liability arising from the use of its product or the results obtained. IMPER ITALIA srl pursues a policy of continuous product improvement. As a result, the company reserves the right to make any necessary changes to the information contained in this publication at any time and without notice.

ISO 9001
ISO 14001
OHSAS 18001
BUREAU VERITAS
Certification



Imper Italia srl Via Volta, 8 · 10071
Frazione Mappano · Borgaro (TO) Italy
Tel (+39) 011 222.54.99 · Fax (+39) 011 222.54.80
export@imper.it · www.imper.it

RUBBERFUSE DIVISION Via Volta, 9 · 10071 Fraz. Mappano · Borgaro (TO) Italy · Tel (+39) 011 222.54.99 · Fax (+39) 011 262.51.87 · rubberfuse@imper.it