


## L-SHAPED PERIMETER PROFILE

TPO

PVC

### Description

Perimeter profile in L-shaped plasticised panel with 16.6 cm development. Perimeter covering cap at the end of containment element.

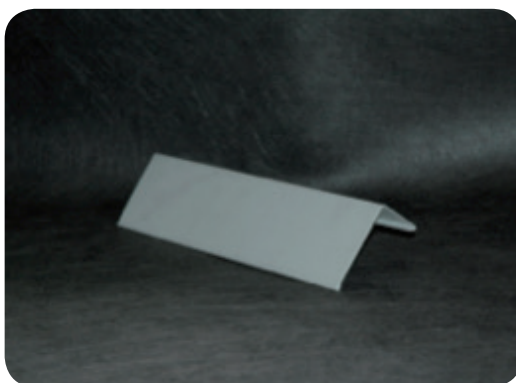

### Fields of application

The profile provides aesthetic continuity with direct connection (welding) between the membrane used for the prevalent part of the surface, vertically and the finishing areas (finishing profiles, flashing, etc.).

### Application

Profiles fastened mechanically on which it is possible to seal the waterproof surface with hot air.

#### TECHNICAL FEATURES

Features	U.M.	Values
Development	mm	166
Length	m	2
Thickness	mm	1,2
Weight	kg/m	1,1
Colour		Grey

---

Rev. 00 (11-15)

As IMPER ITALIA srl has no control over how or where its products are supplied (e.g., over substrates, service conditions, or compliance with instructions), the company cannot accept any liability arising from the use of its product or the results obtained. IMPER ITALIA srl pursues a policy of continuous product improvement. As a result, the company reserves the right to make any necessary changes to the information contained in this publication at any time and without notice.

ISO 9001  
ISO 14001  
OHSAS 18001  
BUREAU VERITAS  
Certification



**Imper Italia srl** Via Volta, 8 · 10071  
Frazione Mappano · Borgaro (TO) Italy  
Tel (+39) 011 222.54.99 · Fax (+39) 011 222.54.80  
[export@imper.it](mailto:export@imper.it) · [www.imper.it](http://www.imper.it)

---

**RUBBERFUSE DIVISION** Via Volta, 9 · 10071 Fraz. Mappano · Borgaro (TO) Italy · Tel (+39) 011 222.54.99 · Fax (+39) 011 262.51.87 · [rubberfuse@imper.it](mailto:rubberfuse@imper.it)