


IMPER WATERBAR

TPO PVC

Description

Flexible joint for the partitioning of synthetic waterproofing systems with PVC-P and TPO membranes.

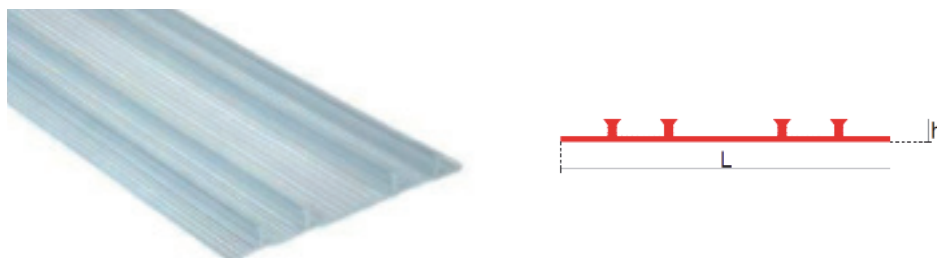

Features

- Flexibility at low temperatures.
- High resistance to impact.
- Excellent weldability.
- Rot-proof characteristics.

Fields of application

Partitioning of synthetic waterproofing systems for tunnels and underground structures with membranes in PVC-P and TPO.

Application

The partitioning joints will be applied in total adhesion to the waterproof layer by automatic or manual thermal diffusion.

TECHNICAL FEATURES

Features	EN Standards	U.M.	Tolerance	Values			
				250	320	400	600
Width (L)		mm		250	320	400	600
Length		m		25			
Thickness		mm		25			
Colour				Translucent			
Ribbing		n		4	4	4	6
Rib height (h)		mm		30			
Hardness	ISO 868	Shore A	(-5/+5%)	75			
Density	ISO 1183	g/c3	(-0.05/+0.05%)	1,43			
Tensile strength	ISO 527	MPa		13			
Elongation at break	ISO 527	%		300			

Rev. 00 (11-15)

As IMPER ITALIA srl has no control over how or where its products are supplied (e.g., over substrates, service conditions, or compliance with instructions), the company cannot accept any liability arising from the use of its product or the results obtained. IMPER ITALIA srl pursues a policy of continuous product improvement. As a result, the company reserves the right to make any necessary changes to the information contained in this publication at any time and without notice.

ISO 9001
ISO 14001
OHSAS 18001
BUREAU VERITAS
Certification



Imper Italia srl Via Volta, 8 · 10071
Frazione Mappano · Borgaro (TO) Italy
Tel (+39) 011 222.54.99 · Fax (+39) 011 222.54.80
export@imper.it · www.imper.it

RUBBERFUSE DIVISION Via Volta, 9 · 10071 Fraz. Mappano · Borgaro (TO) Italy · Tel (+39) 011 222.54.99 · Fax (+39) 011 262.51.87 · rubberfuse@imper.it