

FLASHING DETAILS multifunctional waterproofing paste

FLASHING DETAILS is a ready-mix mono-component waterproofing paste based on special elastomers and selected bitumen in water dispersion reinforced with specific fibers



STRENGTHS


- IDEAL FOR FITTINGS AND CONSTRUCTION DETAILS
- HIGH ADHESION ON ALL SUPPORTS
- FLEXIBLE AT LOW TEMPERATURE
- NO DRIP AT HIGH TEMPERATURE
- RESISTANT TO PONDING WATER
- NO NEED REINFORCEMENT
- UV RESITANT
- NO NEED PRIMER
- HIGH THIXOTROPY
- WATER BASED



^{1 - 5 - 20} kg Buckets

FLASHING DETAILS paste is an excellent waterproofing product, that has been designed to be used in the following cases:

- → Waterproofing of upstands, edges, fittings and construction details, instead or in combination with modified bitumen membranes
- → Protection and sealing of metal surfaces (corrugated metal sheets, gutters, etc.)
- → Protection and sealing of emerging elements (Poles, pipes, outlets, aerators, etc.)
- → Repairing of old bituminous membranes

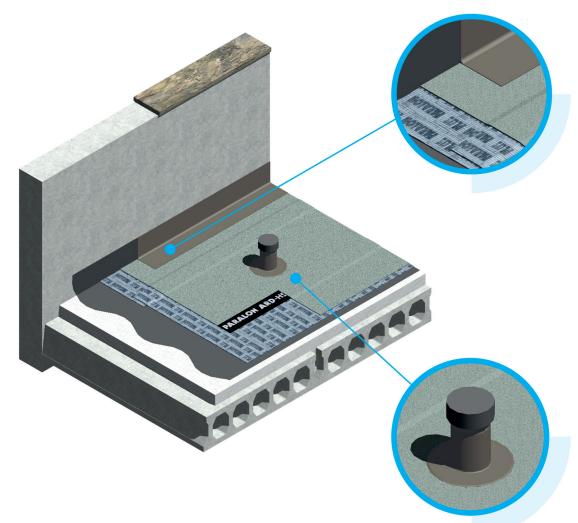

APPLICATION METHOD

- 1. Assure that the surfaces to be treated are smooth, clean and dry, free of oil, dust and debris and assure that the roof has a proper slope.
- Apply by brush (250 gr/linear meter) a coat of FLASHING DETAILS between the vertical and horizontal edges.
- 3. After 3-4 hours, in relation to the atmospheric conditions, apply by brush or roller a coat of flashing details paste on the entire surface to be treated.
- 4. After 24 hours, apply another coat, by brush or roller, a final coat of flashing details paste (1 kg/m2) and then wait for the drying time before being walkable and before applying any eventual protective color coat, if required.





09.2024 V01 - EN